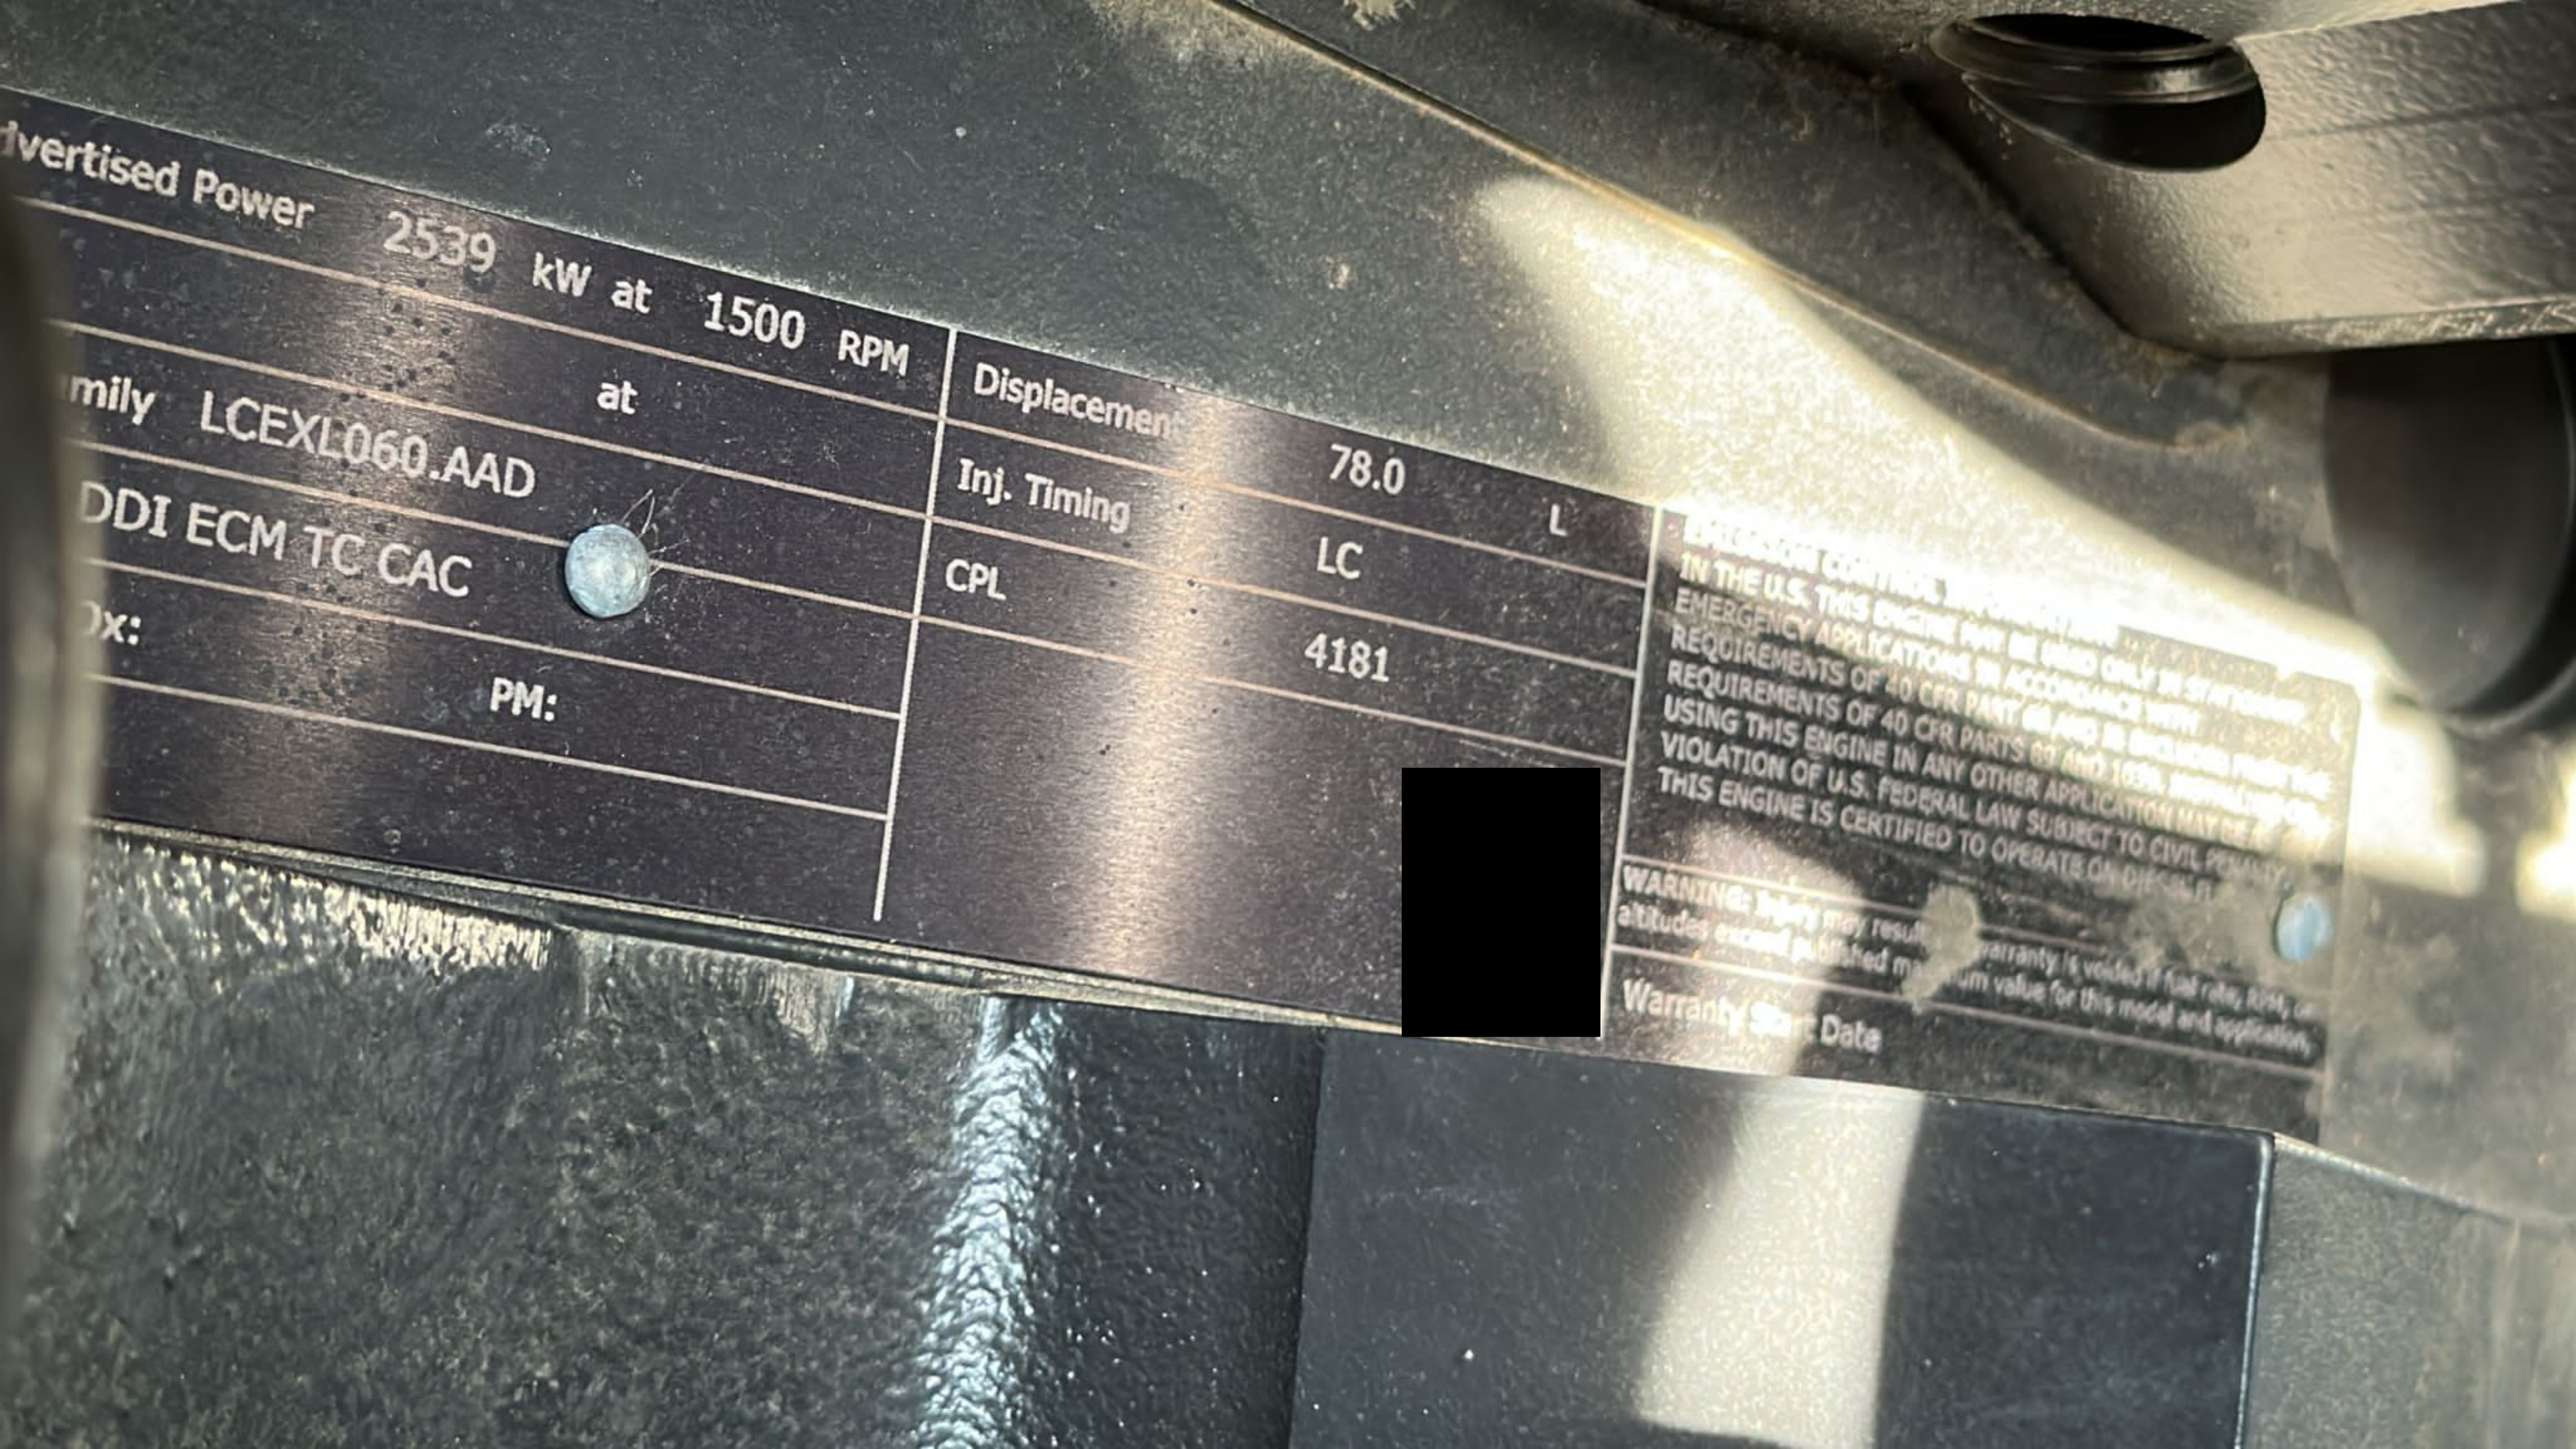
dvertised Power 2539 kW at 1500 RPM
at
mily LCEXL060.AAD
DDI ECM TC CAC
Dx:
PM:
Displacement 78.0 L
Inj. Timing LC
CPL 4181
[redacted]
IN THE U.S. THIS ENGINE
EMERGENCY APPLICATIONS IN ACCORDANCE WITH
REQUIREMENTS OF 40 CFR PARTS 87 AND 1039.
REQUIREMENTS OF 40 CFR PART 86 AND IS EXCLUDED FROM THE
USING THIS ENGINE IN ANY OTHER APPLICATION MAY BE A
VIOLATION OF U.S. FEDERAL LAW SUBJECT TO CIVIL PENALTY.
THIS ENGINE IS CERTIFIED TO OPERATE ON DIESEL FUEL
WARNING: Injury may resul
altitudes exceed published m
warranty is voided if fuel rate, RPM,
um value for this model and application.
Warranty Start Date